

Touret de câble USB 2.0, 100m, très flexible, diamètre extérieur 3mm, noir

Numéro d'article ART-R100
Longueur 100000mm




Description du produit

Touret de câble USB 2.0, très flexible, diamètre extérieur seulement 3mm, noir


Spécifications techniques

- Matériau du câble USB, fin et flexible
- longueur : 100m
- couleur : noir (semi-mat)
- diamètre : Ø 3mm +/- 0.15mm
- Câble de Copartner avec UL 2725, VW-1, 30V, 80°C
- 30AWG/1P (vert, blanc), 28AWG/2C (rouge, noir)
- double blindage
- compatible USB 2.0 & USB 1.1
- pour 480 Mbps (haute vitesse), 12 Mbps (pleine vitesse) et 1,5 Mbps (basse vitesse)
- Conforme à la directive RoHS
- Nous utilisons ce matériau de câble pour notre série de câbles ART-xx (Whiteflex Black Edition).
- Livraison sans fiche

Plus d'images

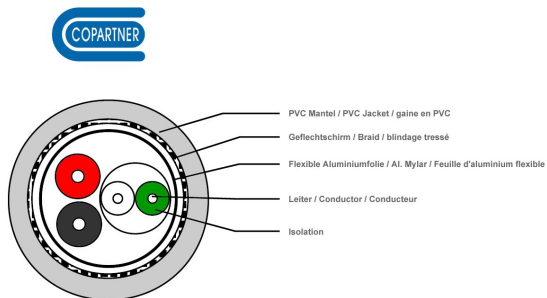

100m

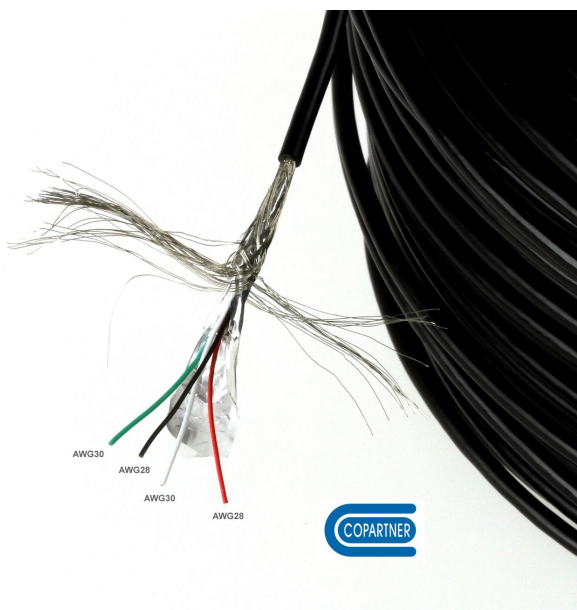

SPECIFICATION: | IP*30AWG+2C*28AWG+AL.Mylar +Braid

ITEM	SPECIFICATION	
	30AWG	28AWG
CONDUCTOR	MATERIAL	TINNED COPPER
	COND.SIZE	7.0.10 ± 0.008mm
INSULATION	MIN.AVG.THICK	0.15mm
	MATERIAL	HD-PE
DRAIN	O . D	0.66 ± 0.05mm
	N.O.	1P
Face Outside	AWG	2C
	MATERIAL	AL.MYLAR
AL.MYLAR	COVERAGE	100%
	OVERLAP	25% MIN
BRAID	MATERIAL	TINNED COPPER
	SIZE	16 *4.0.10± 0.008mm
COPPER	MIN.AVG.THICK	0.23mm
	MATERIAL	HALF MATT PVC
JACKET	COLOUR	UL813 BLACK
	O . D	3.00 ± 0.15 mm

ELECTRICAL CHARACTERISTICS


1. Rating : TEMP 80°C; VOLTAGE 30V
2. Conductor Resistance: at 20°C MAX
30AWG 376.96Ω/km ;28AWG 237.25Ω/km
3. Insulation Resistance: 10MΩ.km min at 20°C dc 500V
4. Dielectric Strength: AC 500V/1minute

COLOUR CODE:

- 2C*28AWG: 1-RED 2-BLACK
IP*30AWG: GREEN*WHITE

PHYSICAL PROPERTIES OF JACKET

1. Flexibility test: NO CRACKING
2. Flame test: PASS VW-1



(H) COPARTNER WIRE & CABLE (SHENZHEN) MFG CO., LTD.

