

Câble USB 2.0 WHITEFLEX Black Edition flexible + noir 1m

Numéro d'article ART-10
Longueur 1000mm




Description du produit

Câble USB WHITEFLEX Black Edition, 1m, noir, pour Mac/PC, cordon très flexible, diamètre seulement 3mm, Hi-Speed USB 2.0, connectique: USB à 4 broches type A (mâle) - USB à 4 broches type B (mâle)

Caractéristiques

- câble USB 2.0 Whiteflex, Black Edition
- noir & flexible
- Ø env. 3mm
- câble de COPARTNER avec UL 2725
- 28AWG/2C + 30AWG/1P
- E119932 AWM 2725 80? 30V VW-1 COPARTNER
- USB 2.0 A mâle vers USB 2.0 B mâle
- USB 2.0 High Speed
- pour 480 MBit/s (high speed), 12 MBit/s (full speed) et 1.5 MBit/s (low speed)
- RoHS: oui


Plus d'images

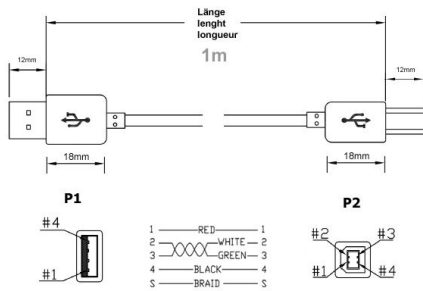

whiteflex
black edition



whiteflex
black edition

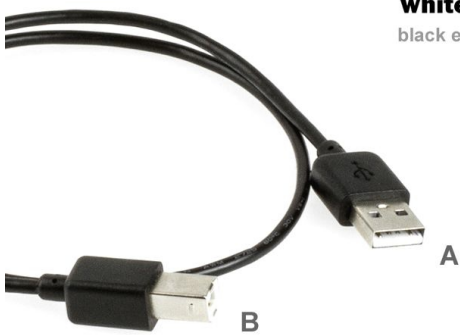

whiteflex
black edition



whiteflex
black edition



SPECIFICATION: 1P*30AWG +2C*28AWG+AL Mylar +Braid

ITEM	SPECIFICATION		
CONDUCTOR	AWG	30AWG	28AWG
	MATERIAL	TINNED COPPER	TINNED COPPER
	COND SIZE	7/0.10 ± 0.008mm	7/0.127 ± 0.008mm
INSULATION	MIN.AVG.THICK	0.15mm	0.10mm
	MATERIAL	HD-PE	SR-PVC LOW TOXIC
	O . D	0.66 ± 0.05mm	0.60 ± 0.05mm
	N.O.	1P	2C
DRAIN	AWG	\	
	MATERIAL	\	
Face Outside	COVERAGE	100%	
	AL MYLAR	OVERLAP 25% MIN	
BRAID	MATERIAL	TINNED COPPER	
	COPPER	SIZE	16 #4/0.10± 0.008mm
JACKET	MIN.AVG.THICK	0.23mm	
	MATERIAL	HALF MATT PVC	
	COLOUR	UL813 BLACK	
	O . D	3.00 ± 0.15 mm	

ELECTRICAL CHARACTERISTICS


- Rating : TEMP 80°C; VOLTAGE 30V
- Conductor Resistance: at 20°C MAX
30AWG 376.96Ω/km ;28AWG 237.25Ω/km
- Insulation Resistance: 10MΩ·km min at 20°C dc 500V
- Dielectric Strength: AC 500V/1minute

PHYSICAL PROPERTIES OF JACKET

- Flexibility test: NO CRACKING
- Flame test: PASS VW-1

COLOUR CODE:

2C*28AWG: 1.RED 2.BLACK
1P*30AWG: GREEN*WHITE



E119932 AWM 2725 80 30V VW-1 COPARTNER



(C) COPARTNER WIRE & CABLE (SHENZHEN) MFG CO., LTD.

