

# Câble USB 2.0 WHITEFLEX Black Edition flexible + noir 60cm

Numéro d'article ART-06

Longueur 600mm



## Description du produit

Câble USB WHITEFLEX Black Edition, 60cm, noir, pour Mac/PC, cordon très flexible, diamètre seulement 3mm, Hi-Speed USB 2.0, connectique: USB à 4 broches type A (mâle) - USB à 4 broches type B (mâle)

## Caractéristiques

- câble USB 2.0 Whiteflex, Black Edition
- noir & flexible
- Ø env. 3mm
- câble de COPARTNER avec UL 2725
- 28AWG/2C + 30AWG/1P
- E119932 AWM 2725 80? 30V VW-1 COPARTNER
- USB 2.0 A mâle vers USB 2.0 B mâle
- USB 2.0 High Speed
- pour 480 MBit/s (high speed), 12 MBit/s (full speed) et 1.5 MBit/s (low speed)
- RoHS: oui

Plus d'images



**whiteflex**  
black edition




**whiteflex**  
black edition

SPECIFICATION:		1P*30AWG+2C*28AWG+ALMylar+Braid	
ITEM	SPECIFICATION		
CONDUCTOR	AWG	30AWG	28AWG
	MATERIAL	TINNED COPPER	TINNED COPPER
	COND SIZE	7.0.10 ± 0.008mm	7.0.127 ± 0.008mm
INSULATION	MIN.AVG.THICK	0.15mm	0.10mm
	MATERIAL	HD-PE	SR-PVC LOW TOXIC
	O. D	0.66 ± 0.05mm	0.60 ± 0.05mm
	N.O.	1P	2C
DRAIN	AWG	\	
	MATERIAL	\	
	SIZE	\	
Face Outside	COVERAGE	100%	
AL.MYLAR	OVERLAP	25% MDN	
BRAID	MATERIAL	TINNED COPPER	
	SIZE	16 *4.0.10± 0.008mm	
JACKET	MIN.AVG.THICK	0.23mm	
	MATERIAL	HALF MATT PVC	
	COLOUR	ULS13 BLACK	
	O. D	3.00 ± 0.15 mm	

- ELECTRICAL CHARACTERISTICS**
1. Rating : TEMP 80°C; VOLTAGE 30V
  2. Conductor Resistance: at 20°C MAX  
30AWG 376.96Ω/km ;28AWG 237.25Ω/km
  3. Insulation Resistance: 10MΩ·km min at 20°C de 500V
  4. Dielectric Strength: AC 500V/1minute

**COLOUR CODE:**  
2C\*28AWG: 1.RED 2.BLACK  
1P\*30AWG: GREEN\*WHITE

- PHYSICAL PROPERTIES OF JACKET**
1. Flexibility test: NO CRACKING
  2. Flame test: PASS VW-1




(c) COPARTNER WIRE & CABLE (SHENZHEN) MFG CO., LTD.



**whiteflex**  
black edition

E119932 AWM 2726 80 30V VW-1 COPARTNER



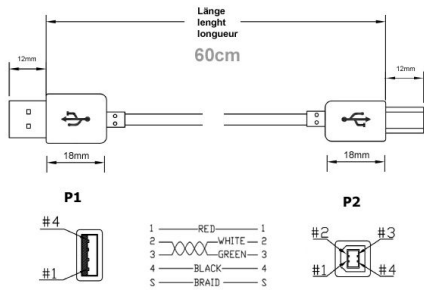

**whiteflex**  
black edition

